


Solenoid Valves Upgrade Compatible with Netstal® Pet-Line® Injection Press Gate Valve Function

- High flow characteristics: up to 13.700 NI/min (13.7 Cv) allowing fast opening and closing times for a more accurate quantity of plastic injected
- High resistance to contamination
- Unaffected by pressure variations
- Lower air consumption - MAC Valves rubber bonded spool reduces air leakages
- Superior reliability compared to OEM supplied valves - less downtimes
- Check valve and accumulator to avoid motor boating - Check valve and accumulator keep the pilot pressure constant and allow the valve to shift in case of inlet pressure drop
- Food grade greases



MAC 57 Series

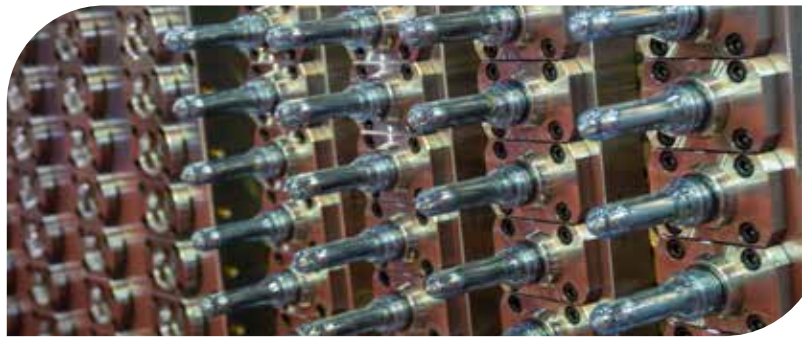

MAC FEATURES

- ✓ Balanced spool unaffected by back pressure in the exhaust or by inlet restrictions
- ✓ Pilot valve with balanced poppet, high flow, short and consistent response times
- ✓ Short stroke with very high flow
- ✓ A large checked accumulator which supplies the pilot and air / spring return for consistent shifting
- ✓ Bonded spool with minimum friction, shifting in a glass like finished bore
- ✓ Wiping effect eliminates sticking
- ✓ Burn out proof MAC solenoid, life time guarantee on coils
- ✓ Repair kit available for the complete valve

OPTIONS

- ✓ Approved for food grade greases
- ✓ Stainless steel screws & washdown modification
- ✓ Modification for high temperatures (up to 70°C)
- ✓ Manifold mounting available for user - friendly maintenance
- ✓ Availability of transition plates and manifold bases for direct drop-in on existing solutions (please consult factory)
- ✓ LED indicators on valves optional
- ✓ Wide range of coils and electrical connectors

MAC Valves - Highly engineered solutions for the highest performing applications since 1948



MAC Valves Inc, Wixom, Michigan - MAC Valves Inc, Dundee, Michigan
MAC Valves Europe Inc, Liège, Belgium - MAC Valves Asia Inc, Taiwan

To find your local distributor, visit www.macvalves.com



